

PA/5000LT™

label printer/applicator




HANDHELD INTERFACE can be used remotely anywhere within 8' of the applicator

The industry's fastest, toughest label printer/applicator!

The PA/5000LT is capable of printing and applying up to 110 labels per minute. With rugged steel and aluminum construction, it's tough enough for three-shift operation in the most demanding conditions. That's why it comes with a 2-year warranty.

features & benefits

- *Choice of Print Engines* from three leading manufacturers
- *Choice of Print Resolution* with 203, 300, or 600 dpi print heads
- *Print/Apply Speed* up to 110 ppm
- *Application Versatility* for top, bottom, adjacent, side, leading and trailing panel applications
- *2-Year Warranty* compared to 1-year industry standard
- *Menu-Driven Interface* for easy set-up and operation
- *Advanced Diagnostics* for fast, accurate troubleshooting
- *Web Monitor Logic* signals supply status and liner breaks
- *Discrete I/O* to communicate status conditions to external devices
- *Message Editing* capability for "when printed" fields
- *Quick-Change* label/ribbon supply
- *Message Storage* capability for stand-alone use

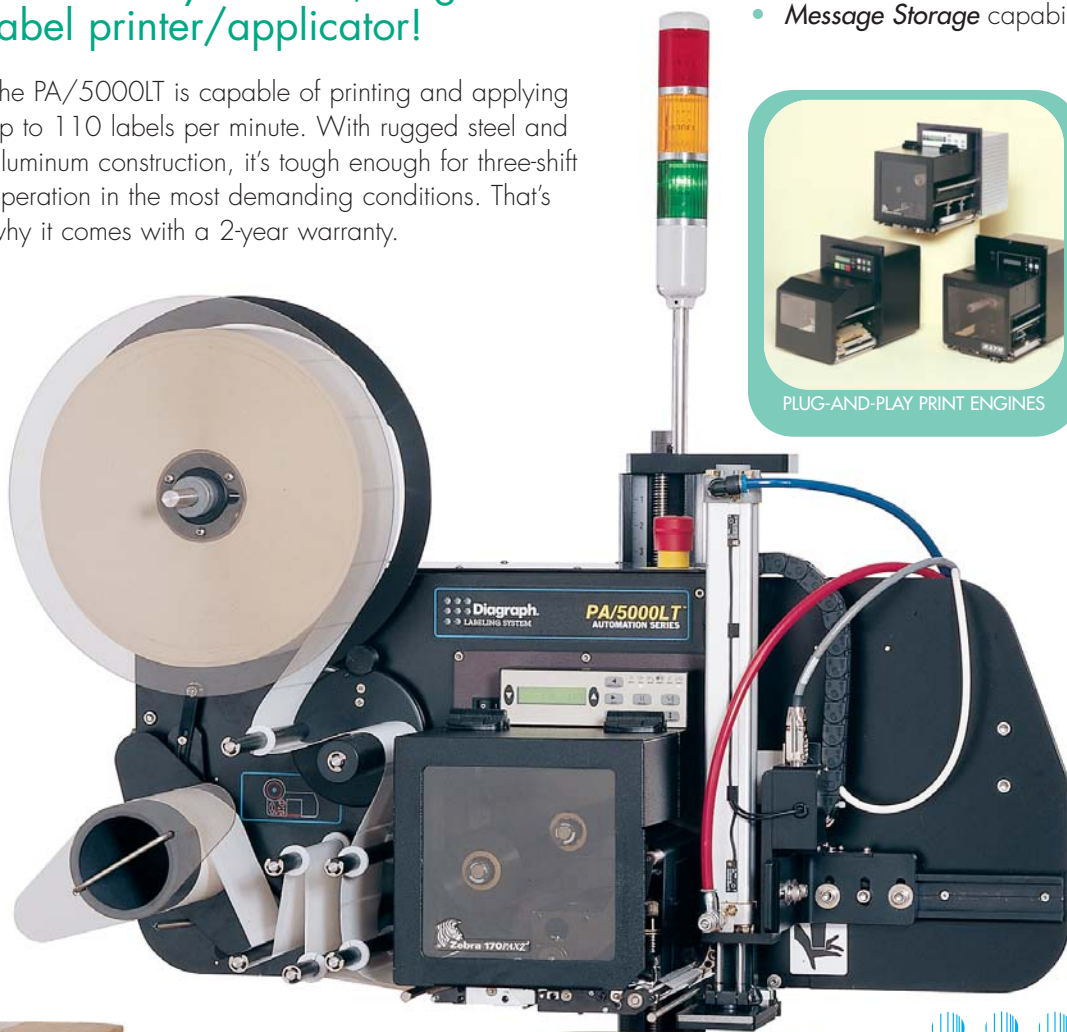

PLUG-AND-PLAY PRINT ENGINES



PALLET LABELING



ADJACENT-PANEL LABELING

 **Diagraph**
An *TW* Company

Designed to deliver versatile 24/7 performance.

Versatile

With a choice of print engines (Sato®, Zebra® or Datamax®) and applicator modules, the PA/5000LT is designed for maximum application versatility.

Quick-Change Supply Hub

and rewind clip for convenience and minimum changeover time. OD label roll capacity is 13 inches.

Heavy-Duty T-Base Stand

with locking casters.

- **360° Yoke/90° Base Plate Rotation** for side, top, bottom labeling
- **Tamp Cylinders:** 12" and 18" lengths
- **Applicator Modules:** dual-label/dual-panel, tamp-blow, wipe-on, multiple swing arms

High-Speed Cylinder with dual stroke sensors. Tamp assembly includes label-present and auto-retract sensors, allowing labels to be applied 2" to 16" from the applicator.

Pneumatic Module with dedicated dial indicators and regulators for individual functions.

Handheld Interface

with QWERTY keypad and LCD display for access to menus, diagnostics, job and status information. Diagnostic menu tests every sensor and valve in the system. All settings can be password protected. Jobs can be cleared and test labels printed using the keypad. Interface allows networking with other units.

Web Management

provides smooth operation and extended life.

Maximum Label Size

is 7.2" x 13"

For more information on all Diagraph products, complete specifications, labeling consumables and service, please visit our website:
www.diagraph.com

 **Diagraph®**
An **TW** Company

1 Missouri Research Park Drive • St. Charles, MO 63304 • Phone: 800-722-1125 • Fax: 636-300-2004
Equipment Sales: 800-722-1125 • Service, Parts & Inks: 800-526-2531 • Labeling Consumables: 800-695-0036

© 2002 Diagraph • Printed in U.S.A. • CQ • 7/02 • 10M